

**SPECIFICATIONS**


No. of cylinders / valves	4L / 2	
Injection System	COMMON RAIL	
Turbocharger	WG (TC)	
Displacement	liters	2.8
Bore x Stroke	millimeters	91 x 108
Max power	kW (HP) @ rpm	55 (75) @ 2300
Max Torque	Nm @ rpm	260 @ 1800
ATS	DOC (Tier4F) / DOC - DPF (Stage V)	
Certification	Stage V - Tier 4 Final	

**WEIGHT AND DIMENSIONS**

Dimensions (L x W x H)	mm	691 x 585 x 839
Dry Weight	Kg	290

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

**POWER & TORQUE**

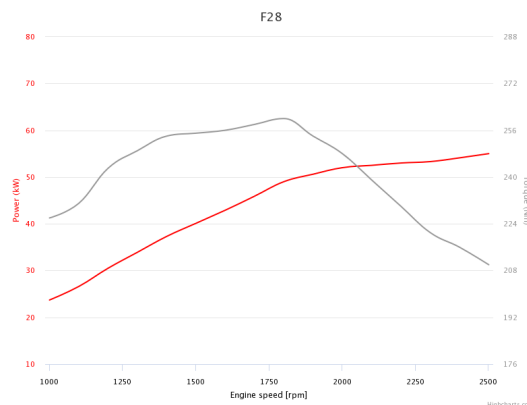

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

**AGRICULTURE**

Do you want to know more?



LEGEND

**Air Handling**  
NA (Naturally Aspirated)  
TC (Turbocharged)  
TCA (Turbocharged with aftercooler)

**Turbocharger**  
WG (Wastegate)  
VGT (Variable Geometry Turbocharger)  
TST (Twin-Stage Turbocharger)

**Exhaust System**  
EGR (Exhaust Gas Recirculation)  
SCR (Selective Catalytic Reduction)  
DPF (Diesel Particulate Filter)  
DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE [WWW.FPTINDUSTRIAL.COM](http://WWW.FPTINDUSTRIAL.COM)

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

