

OFF ROAD

Agriculture

N45

N45
114 kW (155 HP) @ 1800 rpm
Stage V - Tier 4 Final

SPECIFICATIONS

No. of cylinders / valves	4L / 4
Injection System	COMMON RAIL
Turbocharger	WG (TCA)
Displacement	liters 4.5
Bore x Stroke	millimeters 104 x 132
Max power	kW (HP) @ rpm 114 (155) @ 1800
Max Torque	Nm @ rpm 640 @ 1500
ATS	HI-eSCR2
Certification	Stage V - Tier 4 Final

WEIGHT AND DIMENSIONS


Dimensions (L x W x H)	mm	817 x 684 x 984
Dry Weight	Kg	426

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER & TORQUE

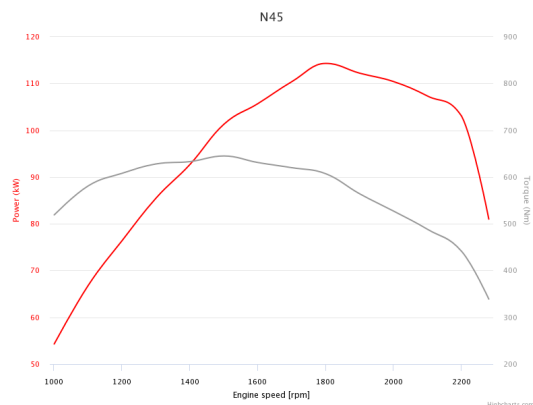

AGRICULTURE

Do you want to know more?



LEGEND

Air Handling

TCA (Turbocharged with aftercooler)
TC (Turbocharged)
NA (Naturally Aspirated)

Turbocharger

WG (Wastegate)
VGT (Variable Geometry Turbocharger)
TST (Twin Stage Turbocharger)

Exhaust System

EGR (Exhaust Gas Recirculation)
SCR (Selective Catalytic Reduction)
DOC (Diesel Oxidation Catalyst)
DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

