

SPECIFICATIONS

No. of cylinders / valves	6L / 4	
Injection System	COMMON RAIL	
Turbocharger	WG (TCA)	
Displacement	liters	15.9
Bore x Stroke	millimeters	141 x 170
Max power	kW (HP) @ rpm	570 (775) @ 1900
Max Torque	Nm @ rpm	3323 @ 1500
ATS	SCR	
Certification	Stage V - Tier 4 Final	

WEIGHT AND DIMENSIONS


Dimensions (L x W x H)	mm	1378 x 1034 x 1197
Dry Weight	Kg	1334

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER & TORQUE

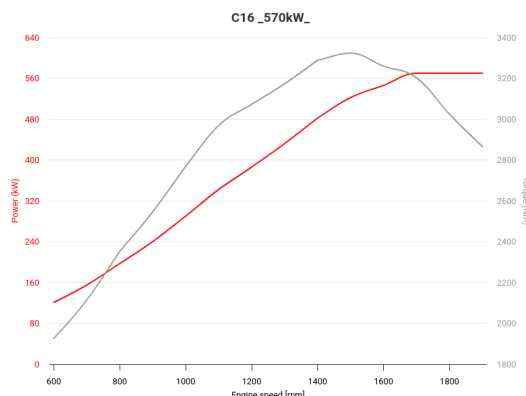

AGRICULTURE

Do you want to know more?



LEGEND

Air Handling

- NA (Naturally Aspirated)
- TC (Turbocharged)
- TCA (Turbocharged with aftercooler)

Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin-Stage Turbocharger)

Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DPF (Diesel Particulate Filter)
- DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

