

OFF ROAD

Agriculture

CURSOR 16

C16

570 kW (775 HP) @ 1900 rpm
Stage V - Tier 4 Final

SPECIFICATIONS


No. of cylinders / valves	6L / 4
Injection System	COMMON RAIL
Turbocharger	WG (TCA)
Displacement	liters 15.9
Bore x Stroke	millimeters 141 x 170
Max power	kW (HP) @ rpm 570 (775) @ 1900
Max Torque	Nm @ rpm 3323 @ 1500
ATS	SCR
Certification	Stage V - Tier 4 Final

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1378 x 1034 x 1197
Dry Weight	Kg	1334

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

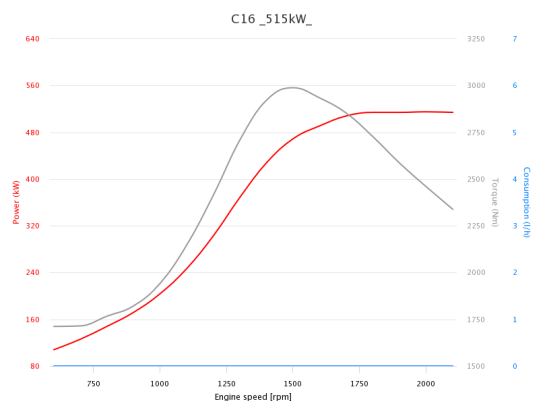

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

AGRICULTURE

Do you want to know more?

LEGEND

Air Handling

TCA (Turbocharged with aftercooler)
TC (Turbocharged)
NA (Naturally Aspirated)

Turbocharger

WG (Wastegate)
VGT (Variable Geometry Turbocharger)
TST (Twin Stage Turbocharger)

Exhaust System

EGR (Exhaust Gas Recirculation)
SCR (Selective Catalytic Reduction)
DOC (Diesel Oxidation Catalyst)
DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

