

SPECIFICATIONS

No. of cylinders / valves	4L / 4	
Injection System	COMMON RAIL	
Turbocharger	WG (TCA)	
Displacement	liters	4.5
Bore x Stroke	millimeters	104 x 132
Max power	kW (HP) @ rpm	98 (133) @ 1800
Max Torque	Nm @ rpm	549 @ 1500
ATS	HI-eSCR2	
Certification	Stage V - Tier 4 Final	

WEIGHT AND DIMENSIONS


Dimensions (L x W x H)	mm	817 x 684 x 853
Dry Weight	Kg	426

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER & TORQUE

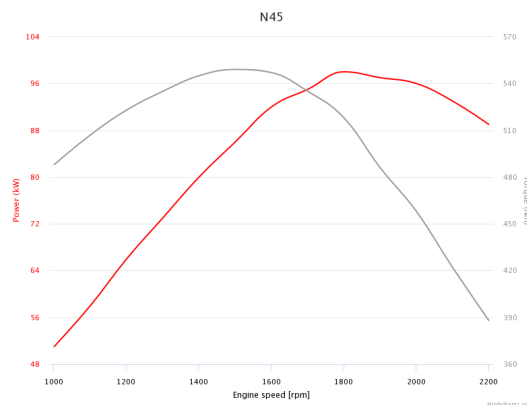

AGRICULTURE

Do you want to know more?



LEGEND

Air Handling
NA (Naturally Aspirated)
TC (Turbocharged)
TCA (Turbocharged with aftercooler)

Turbocharger
WG (Wastegate)
VGT (Variable Geometry Turbocharger)
TST (Twin-Stage Turbocharger)

Exhaust System
EGR (Exhaust Gas Recirculation)
SCR (Selective Catalytic Reduction)
DPF (Diesel Particulate Filter)
DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

