


SPECIFICATIONS

No. of cylinders / valves	4L / 2	
Injection System	COMMON RAIL	
Turbocharger	WG (TC)	
Displacement	liters	3.4
Bore x Stroke	millimeters	99 x 110
Max power	kW (HP) @ rpm	55 (75) @ 2500
Max Torque	Nm @ rpm	314 @ 1400
ATS	DOC+DPF	
Certification	Stage V - Tier 4 Final	

WEIGHT AND DIMENSIONS


Dimensions (L x W x H)	mm	690 x 603 x 902
Dry Weight	Kg	315

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER & TORQUE

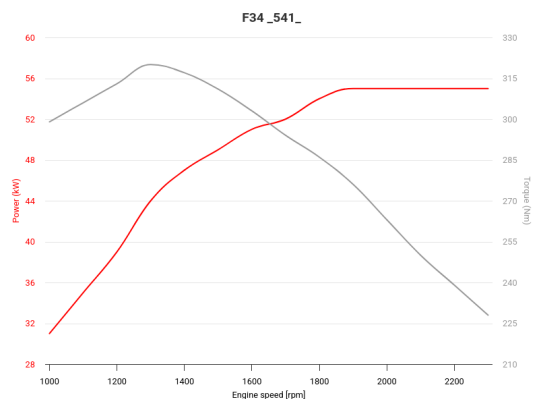

AGRICULTURE

Do you want to know more?



LEGEND

Air Handling

NA (Naturally Aspirated)
TC (Turbocharged)
TCA (Turbocharged with aftercooler)

Turbocharger

WG (Wastegate)
VGT (Variable Geometry Turbocharger)
TST (Twin-Stage Turbocharger)

Exhaust System

EGR (Exhaust Gas Recirculation)
SCR (Selective Catalytic Reduction)
DPF (Diesel Particulate Filter)
DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

