

**SPECIFICATIONS**



No. of cylinders / valves	4L / 4	
Injection System	COMMON RAIL	
Turbocharger	WG (TCA)	
Displacement	liters	3.6
Bore x Stroke	millimeters	102 x 110
Max power	kW (HP) @ rpm	75 (102) @ 2300
Max Torque	Nm @ rpm	430 @ 1400
ATS	Compact HI-eSCR2	
Certification	Stage V - Tier 4 Final	

**WEIGHT AND DIMENSIONS**

Dimensions (L x W x H)	mm	702 x 614 x 898
Dry Weight	Kg	320

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

**POWER & TORQUE**

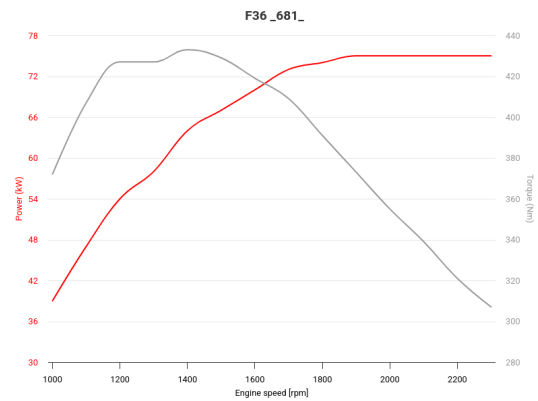

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

**AGRICULTURE**

Do you want to know more?



LEGEND

**Air Handling**

- NA (Naturally Aspirated)
- TC (Turbocharged)
- TCA (Turbocharged with aftercooler)

**Turbocharger**

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin-Stage Turbocharger)

**Exhaust System**

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DPF (Diesel Particulate Filter)
- DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE [WWW.FPTINDUSTRIAL.COM](http://WWW.FPTINDUSTRIAL.COM)

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

