

OFF ROAD

Agriculture

F28

F28
37 kW (50 HP) @ 2300 rpm
Stage V - Tier 4 Final

SPECIFICATIONS


No. of cylinders / valves	4L / 2
Injection System	COMMON RAIL
Turbocharger	WG (TC)
Displacement	liters 2.8
Bore x Stroke	millimeters 91 x 108
Max power	kW (HP) @ rpm 37 (50) @ 2300
Max Torque	Nm @ rpm 207 @ 1400
ATS	DOC (Tier4F) / DOC - DPF (Stage V)
Certification	Stage V - Tier 4 Final

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	691 x 585 x 839
Dry Weight	Kg	290

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

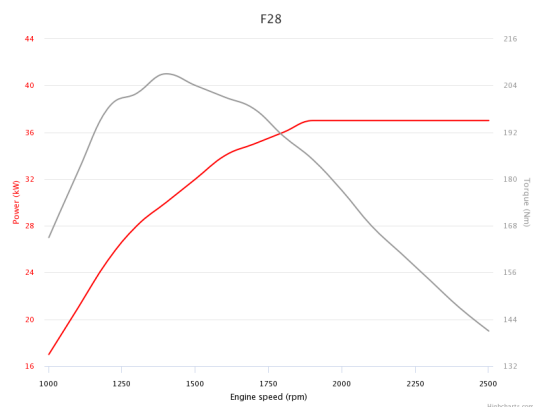

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

AGRICULTURE

Do you want to know more?

LEGEND

Air Handling

TCA (Turbocharged with aftercooler)
TC (Turbocharged)
NA (Naturally Aspirated)

Turbocharger

WG (Wastegate)
VGT (Variable Geometry Turbocharger)
TST (Twin Stage Turbocharger)

Exhaust System

EGR (Exhaust Gas Recirculation)
SCR (Selective Catalytic Reduction)
DOC (Diesel Oxidation Catalyst)
DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

