

OFF ROAD

Agriculture

CURSOR 16

C16

515 kW (700 HP) @ 1900 rpm
Stage V - Tier 4 Final

SPECIFICATIONS

No. of cylinders / valves	6L / 4
Injection System	COMMON RAIL
Turbocharger	WG (TCA)
Displacement	liters 15.9
Bore x Stroke	millimeters 141 x 170
Max power	kW (HP) @ rpm 515 (700) @ 1900
Max Torque	Nm @ rpm 2988 @ 1500
ATS	HI-eSCR2
Certification	Stage V - Tier 4 Final

WEIGHT AND DIMENSIONS


Dimensions (L x W x H)	mm	1477 x 927 x 1366
Dry Weight	Kg	1450

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER & TORQUE

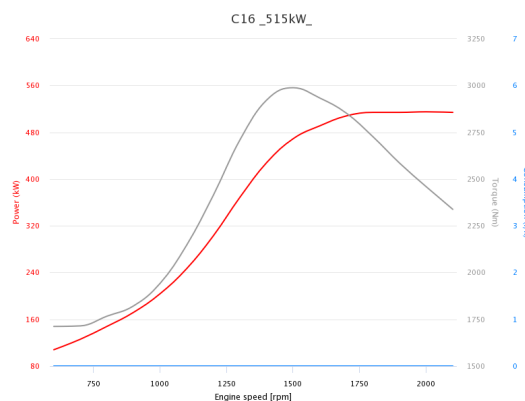

AGRICULTURE

Do you want to know more?



LEGEND

Air Handling

- NA (Naturally Aspirated)
- TC (Turbocharged)
- TCA (Turbocharged with aftercooler)

Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin-Stage Turbocharger)

Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DPF (Diesel Particulate Filter)
- DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

