

SPECIFICATIONS


No. of cylinders / valves	4L / 2	
Injection System	COMMON RAIL	
Turbocharger	WG (TC)	
Displacement	liters	2.8
Bore x Stroke	millimeters	91 x 108
Max power	kW (HP) @ rpm	43 (58) @ 2300
Max Torque	Nm @ rpm	250 @ 1400
ATS	DOC (Tier4F) / DOC - DPF (Stage V)	
Certification	Stage V - Tier 4 Final	

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	691 x 585 x 839
Dry Weight	Kg	290

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

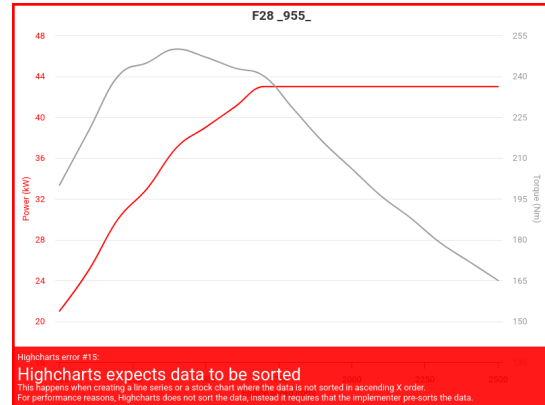

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

AGRICULTURE

Do you want to know more?



LEGEND

Air Handling

- NA (Naturally Aspirated)
- TC (Turbocharged)
- TCA (Turbocharged with aftercooler)

Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin-Stage Turbocharger)

Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DPF (Diesel Particulate Filter)
- DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

