

OFF ROAD

Agriculture

CURSOR 13

CURSOR 13

519 kW (706 HP) @ 1900 rpm

Stage V - Tier 4 Final

SPECIFICATIONS

No. of cylinders / valves	6L / 4
Injection System	COMMON RAIL
Turbocharger	TST (TCA)
Displacement	liters 12.9
Bore x Stroke	millimeters 135 x 150
Max power	kW (HP) @ rpm 519 (706) @ 1900
Max Torque	Nm @ rpm 3092 @ 1400
ATS	HI-eSCR2
Certification	Stage V - Tier 4 Final

WEIGHT AND DIMENSIONS


Dimensions (L x W x H)	mm	1365 x 1106 x 1342
Dry Weight	Kg	1435

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER & TORQUE

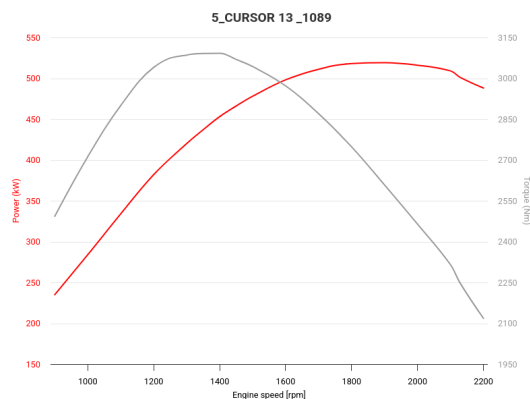

AGRICULTURE

Do you want to know more?

LEGEND

Air Handling

TCA (Turbocharged with aftercooler)
TC (Turbocharged)
NA (Naturally Aspirated)

Turbocharger

WG (Wastegate)
VGT (Variable Geometry Turbocharger)
TST (Twin Stage Turbocharger)

Exhaust System

EGR (Exhaust Gas Recirculation)
SCR (Selective Catalytic Reduction)
DOC (Diesel Oxidation Catalyst)
DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

