

SPECIFICATIONS

No. of cylinders / valves	6L / 4		
Injection System	COMMON RAIL		
Turbocharger	TST (TCA)		
Displacement	liters	12.9	
Bore x Stroke	millimeters	135 x 150	
Max power	kW (HP) @ rpm	519 (706) @ 1900	
Max Torque	Nm @ rpm	3092 @ 1400	
ATS	HI-eSCR2		
Certification	Stage V - Tier 4 Final		

WEIGHT AND DIMENSIONS


Dimensions (L x W x H)	mm	1365 x 1106 x 1342	
Dry Weight	Kg	1435	

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER & TORQUE

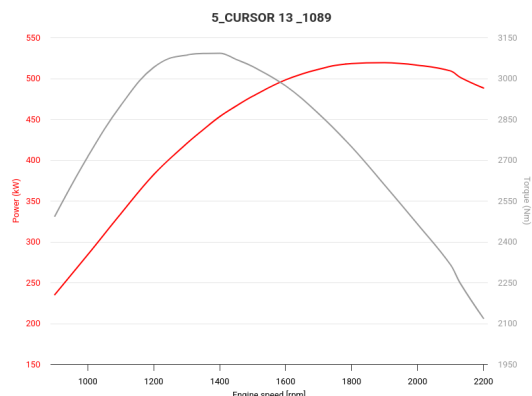

AGRICULTURE

Do you want to know more?



LEGEND

Air Handling
NA (Naturally Aspirated)
TC (Turbocharged)
TCA (Turbocharged with aftercooler)

Turbocharger
WG (Wastegate)
VGT (Variable Geometry Turbocharger)
TST (Twin-Stage Turbocharger)

Exhaust System
EGR (Exhaust Gas Recirculation)
SCR (Selective Catalytic Reduction)
DPF (Diesel Particulate Filter)
DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

