

OFF ROAD

Power Units

CURSOR 9

CURSOR 9

260 kW (353 HP) @ 2100 rpm

Stage III A - Tier 3

SPECIFICATIONS



No. of cylinders / valves		6L / 4
Injection System		COMMON RAIL
Turbocharger		TCA
Displacement	liters	8.7
Bore x Stroke	millimeters	117 x 135
Rated power	kW (HP) @ rpm	260 (353) @ 2100
Max Torque	Nm @ rpm	1500 @ 1400
ATS		/
Certification		Stage III A - Tier 3

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1725 x 1055 x 1580
Dry Weight	Kg	-

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

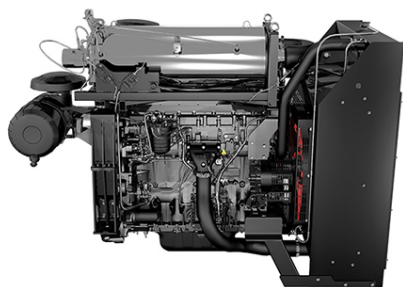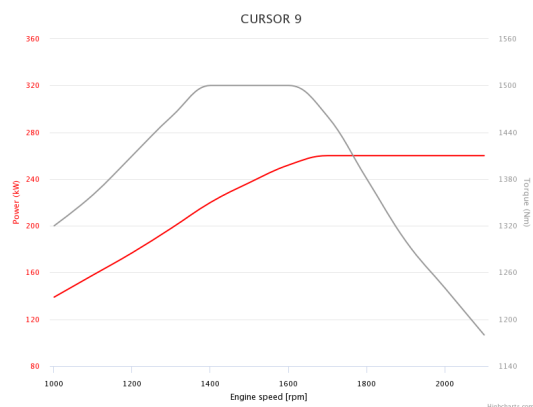

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER UNITS

Do you want to know more?

LEGEND

Air Handling

TCA (Turbocharged with aftercooler)
TC (Turbocharged)
NA (Naturally Aspirated)

Turbocharger

WG (Wastegate)
VGT (Variable Geometry Turbocharger)
TST (Twin Stage Turbocharger)

Exhaust System

EGR (Exhaust Gas Recirculation)
SCR (Selective Catalytic Reduction)
DOC (Diesel Oxidation Catalyst)
DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

