

OFF ROAD

Power Units

F34

F34
55 kW (75 HP) @ 2500 rpm
Stage V - Tier 4 Final

SPECIFICATIONS



No. of cylinders / valves	4L / 2
Injection System	COMMON RAIL
Turbocharger	TC
Displacement	liters 3.4
Bore x Stroke	millimeters 99 x 110
Max power	kW (HP) @ rpm 55 (75) @ 2500
Max Torque	Nm @ rpm 314 @ 1400
ATS	EGR+DOC+DPF
Certification	Stage V - Tier 4 Final

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1217 x 762 x 963
Dry Weight	Kg	-

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

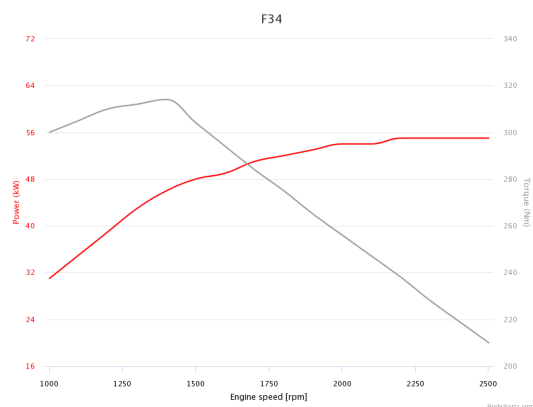

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER UNITS

Do you want to know more?

LEGEND

Air Handling

TCA (Turbocharged with aftercooler)
TC (Turbocharged)
NA (Naturally Aspirated)

Turbocharger

WG (Wastegate)
VGT (Variable Geometry Turbocharger)
TST (Twin Stage Turbocharger)

Exhaust System

EGR (Exhaust Gas Recirculation)
SCR (Selective Catalytic Reduction)
DOC (Diesel Oxidation Catalyst)
DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

