

OFF ROAD

Power Units

F28

F28
75 kW (101 HP) @ 2300 rpm
Stage V

SPECIFICATIONS



| | |
|---------------------------|------------------|
| No. of cylinders / valves | 4L/2 |
| Injection System | COMMON RAIL |
| Turbocharger | TCA |
| Displacement | liters |
| Bore x Stroke | millimeters |
| Max power | kW (HP) @ rpm |
| Max Torque | Nm @ rpm |
| ATS | Compact Hi-eSCR2 |
| Certification | Stage V |

WEIGHT AND DIMENSIONS

| | | |
|------------------------|----|-------------------|
| Dimensions (L x W x H) | mm | 1115 x 720 x 1183 |
| Dry Weight | Kg | - |

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

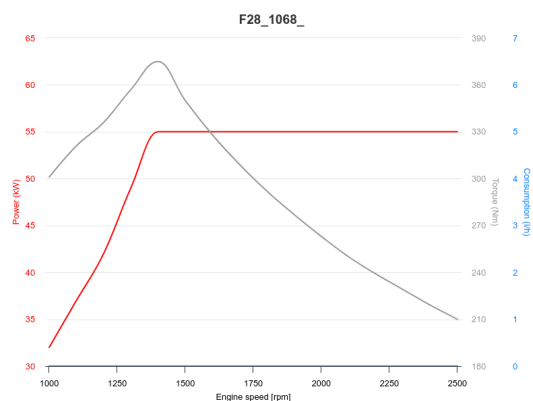

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER UNITS

Do you want to know more?

LEGEND

Air Handling

TCA (Turbocharged with aftercooler)
TC (Turbocharged)
NA (Naturally Aspirated)

Turbocharger

WG (Wastegate)
VGT (Variable Geometry Turbocharger)
TST (Twin Stage Turbocharger)

Exhaust System

EGR (Exhaust Gas Recirculation)
SCR (Selective Catalytic Reduction)
DOC (Diesel Oxidation Catalyst)
DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

