

SPECIFICATIONS

No. of cylinders / valves	6L / 4		
Injection System	COMMON RAIL		
Turbocharger	WG (TCA)		
Displacement	liters	12.9	
Bore x Stroke	millimeters	135 x 150	
Max power	kW (HP) @ rpm	466 (634) @ 1900	
Max Torque	Nm @ rpm	2663 @ 1600	
ATS	HI-eSCR2		
Certification	Stage V - Tier 4 Final		

WEIGHT AND DIMENSIONS


Dimensions (L x W x H)	mm	1378 x 1036 x 1155	
Dry Weight	Kg	1304	

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER & TORQUE

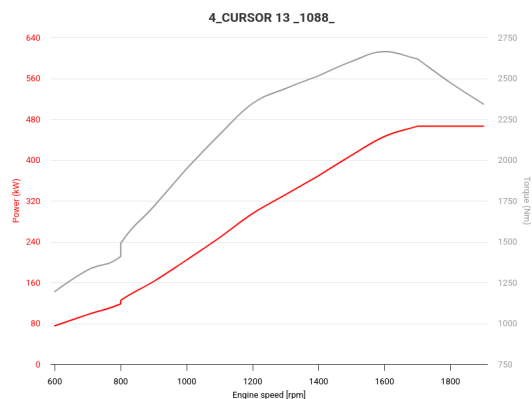

AGRICULTURE

Do you want to know more?



LEGEND

Air Handling

- NA (Naturally Aspirated)
- TC (Turbocharged)
- TCA (Turbocharged with aftercooler)

Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin-Stage Turbocharger)

Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DPF (Diesel Particulate Filter)
- DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

