

SPECIFICATIONS


No. of cylinders / valves	6L / 4	
Injection System	COMMON RAIL	
Turbocharger	WG (TCA)	
Displacement	liters	8.7
Bore x Stroke	millimeters	117 x 135
Max power	kW (HP) @ rpm	275 (374) @ 2000
Max Torque	Nm @ rpm	1510 @ 1500
ATS	HI-eSCR2	
Certification	Stage V - Tier 4 Final	

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1216 x 877.8 x 1071.3
Dry Weight	Kg	870

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

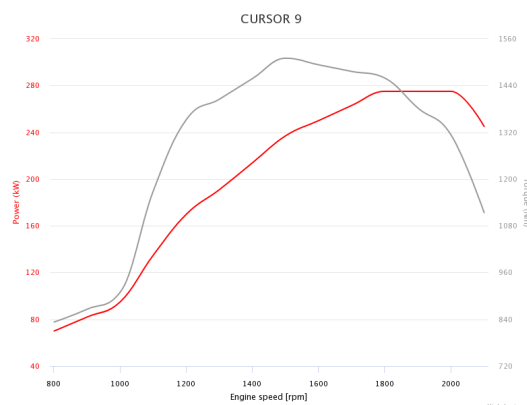

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

AGRICULTURE

Do you want to know more?



LEGEND

Air Handling

- NA (Naturally Aspirated)
- TC (Turbocharged)
- TCA (Turbocharged with aftercooler)

Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin-Stage Turbocharger)

Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DPF (Diesel Particulate Filter)
- DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

