OFF ROAD

Agriculture

N45

N45


147 kW (200 HP) @ 2100 rpm

Stage V - Tier 4 Final

SPECIFICATIONS

No. of cylinders / valves		4L/ 4
Injection System		COMMON RAIL
Turbocharger		WG (TCA)
Displacement	liters	4.5
Bore x Stroke	millimeters	104 x 132
Max power	kW (HP) @ rpm	147 (200) @ 2100
Max Torque	Nm @ rpm	744 @ 1400
ATS		HI-eSCR2
Certification		Stage V - Tier 4 Final

POWER & TORQUE

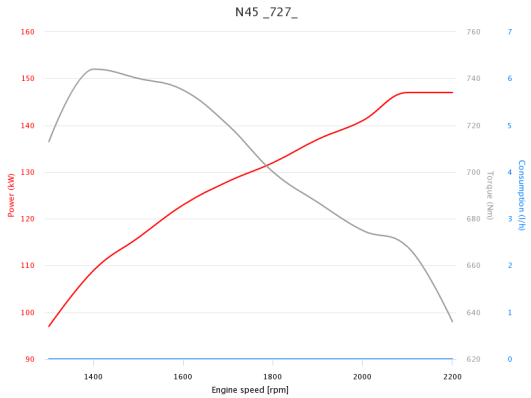

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	817 x 684 x 890
Dry Weight	Kg	426

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

AGRICULTURE

Do you want to know more? CONTACT US

LEGEND

Air Handling

NA (Naturally Aspirated)

TC (Turbocharged)

TCA (Turbocharged with aftercooler)

Turbocharger

WG (Wastegate)

VGT (Variable Geometry Turbocharger)

TST (Twin-Stage Turbocharger)

Exhaust System

EGR (Exhaust Gas Recirculation)

SCR (Selective Catalytic Reduction)

DPF (Diesel Particulate Filter)

DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE