OFF ROAD

Power Units

N45

N45


125 kW (168 HP) @ 2200 rpm

Stage V - Tier 4 Final

SPECIFICATIONS

No. of cylinders / valves		4L /4
Injection System		ECR
Turbocharger		TCA
Displacement	liters	4.5
Bore x Stroke	millimeters	104 x 132
Rated power	kW (HP) @ rpm	125 (168) @ 2200
Max Torque	Nm @ rpm	712 @ 1500
ATS		HI-eSCR2
Certification		Stage V - Tier 4 Final


POWER & TORQUE

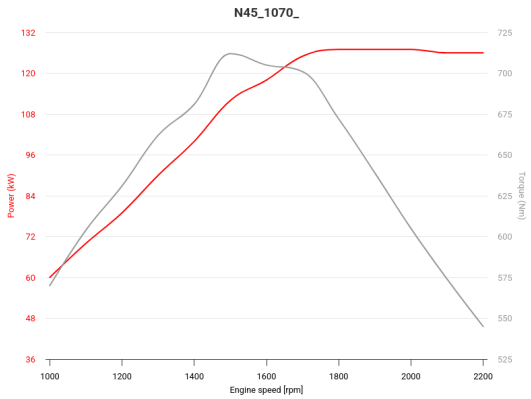

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1409 x 810 x 1698
Dry Weight	Kg	-

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

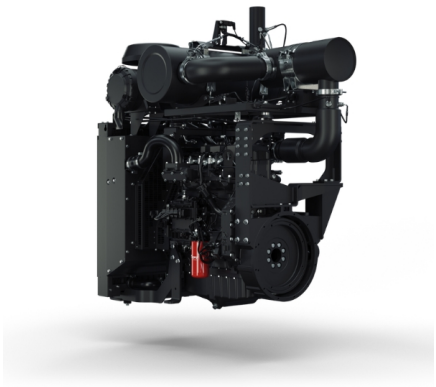

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER UNITS

Do you want to know more? CONTACT US

LEGEND

Air Handling

NA (Naturally Aspirated)

TC (Turbocharged)

TCA (Turbocharged with aftercooler)

Turbocharger

WG (Wastegate)

VGT (Variable Geometry Turbocharger)

TST (Twin-Stage Turbocharger)

Exhaust System

EGR (Exhaust Gas Recirculation)

SCR (Selective Catalytic Reduction)

DOC (Diesel Oxidation Catalyst)

DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE