

OFF ROAD

Power Units

N45

N45

125 kW (168 HP) @ 2200 rpm

Stage V - Tier 4 Final

SPECIFICATIONS



| | | |
|---------------------------|---------------|------------------------|
| No. of cylinders / valves | | 4L /4 |
| Injection System | | COMMON RAIL |
| Turbocharger | | TCA |
| Displacement | liters | 4.5 |
| Bore x Stroke | millimeters | 104 x 132 |
| Rated power | kW (HP) @ rpm | 125 (168) @ 2200 |
| Max Torque | Nm @ rpm | 712 @ 1500 |
| ATS | | HI-eSCR2 |
| Certification | | Stage V - Tier 4 Final |

WEIGHT AND DIMENSIONS

| | | |
|------------------------|----|-------------------|
| Dimensions (L x W x H) | mm | 1409 x 810 x 1698 |
| Dry Weight | Kg | - |

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

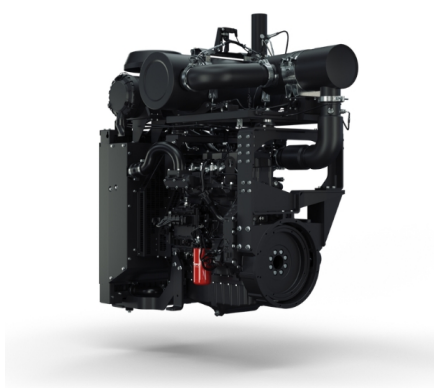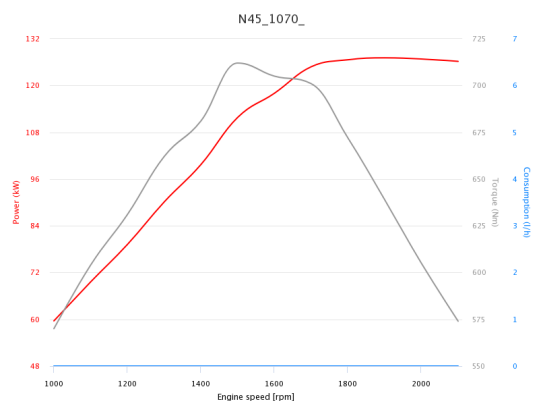

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER UNITS

Do you want to know more?

LEGEND

Air Handling

TCA (Turbocharged with aftercooler)
TC (Turbocharged)
NA (Naturally Aspirated)

Turbocharger

WG (Wastegate)
VGT (Variable Geometry Turbocharger)
TST (Twin Stage Turbocharger)

Exhaust System

EGR (Exhaust Gas Recirculation)
SCR (Selective Catalytic Reduction)
DOC (Diesel Oxidation Catalyst)
DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

