
ON ROAD
Trucks
N45

N45
152 kW (207 HP) @ 2500 rpm
Euro VI E

SPECIFICATIONS

No. of cylinders / valves		4L / 4
Injection System		ECR
Turbocharger		WG
Displacement	liters	4.5
Bore x Stroke	millimeters	104 x 132
Max power	kW (HP) @ rpm	152 (207) @ 2500
Max torque	Nm @ rpm	750 @ 1400
ATS		DOC + DPF + SCR + CUC
Certification		Euro VI E

POWER & TORQUE

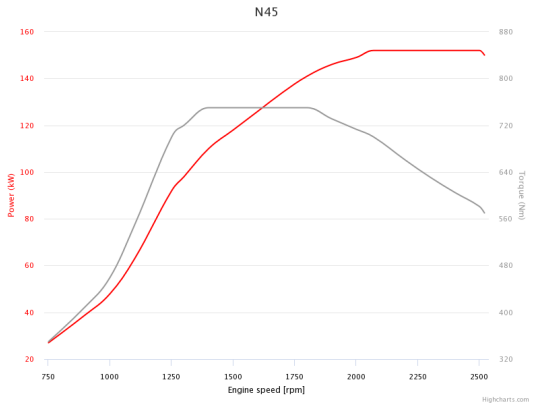

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	854 x 782 x 910
Dry Weight	Kg	400

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

TRUCKS

Do you want to know more? CONTACT US

LEGEND

Turbocharger

e-VGT (Electronic Variable Geometry Turbo)

2stT (Twin-Stage Turbo)

WG (Fixed Geometry Turbocharger with Waste Gate valve)

Injection System

EUI (Electronically Controlled Unit Injector)

MPI (Multi-Points Injection)

ECR (Electronic Common Rail)

Exhaust System

ATS (Aftertreatment System)
CCDPF (Cross Coupled Diesel Particulate Filter)

CUC (Clean Up Catalyst)
DOC (Diesel Oxidation Catalyst)
SCR (Selective Catalytic Reduction)
DPF (Diesel Particulate Filter w/ passive regeneration)

EGR (External Exhaust Gas Recirculation)

HPEGR (High Pressure Cooled External EGR)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE