

# OFF ROAD

## Agriculture

# CURSOR 13

# CURSOR 13

415 kW (564 HP) @ 1900 rpm  
Stage V - Tier 4 Final

### SPECIFICATIONS


No. of cylinders / valves	6L / 4
Injection System	COMMON RAIL
Turbocharger	WG (TCA)
Displacement	liters 12.9
Bore x Stroke	millimeters 135 x 150
Max power	kW (HP) @ rpm 415 (564) @ 1900
Max Torque	Nm @ rpm 2401 @ 1400
ATS	HI-eSCR2
Certification	Stage V - Tier 4 Final

### WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1355 x 953 x 1213
Dry Weight	Kg	1320

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

### POWER & TORQUE

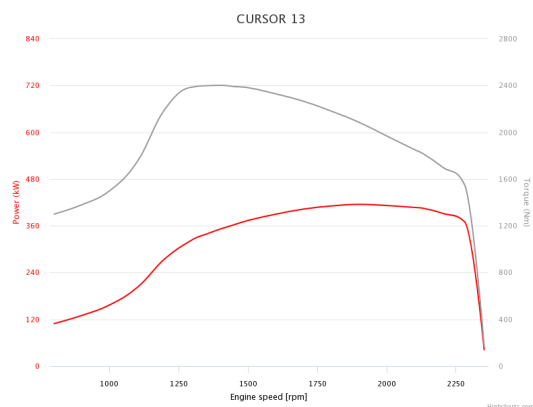

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

AGRICULTURE

Do you want to know more?

#### LEGEND

##### Air Handling

NA (Naturally Aspirated)  
TC (Turbocharged)  
TCA (Turbocharged with aftercooler)

##### Turbocharger

WG (Wastegate)  
VGT (Variable Geometry Turbocharger)  
TST (Twin-Stage Turbocharger)

##### Exhaust System

EGR (Exhaust Gas Recirculation)  
SCR (Selective Catalytic Reduction)  
DPF (Diesel Particulate Filter)  
DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE [WWW.FPTINDUSTRIAL.COM](http://WWW.FPTINDUSTRIAL.COM)

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

