
OFF ROAD
Agriculture
F36

F36
90 kW (122 HP) @ 2300 rpm
Stage V - Tier 4 Final

SPECIFICATIONS

No. of cylinders / valves		4L / 4
Injection System		COMMON RAIL
Turbocharger		WG (TCA)
Displacement	liters	3.6
Bore x Stroke	millimeters	102 x 110
Max power	kW (HP) @ rpm	90 (122) @ 2300
Max Torque	Nm @ rpm	490 @ 1400
ATS		Compact HI-eSCR2
Certification		Stage V - Tier 4 Final


POWER & TORQUE

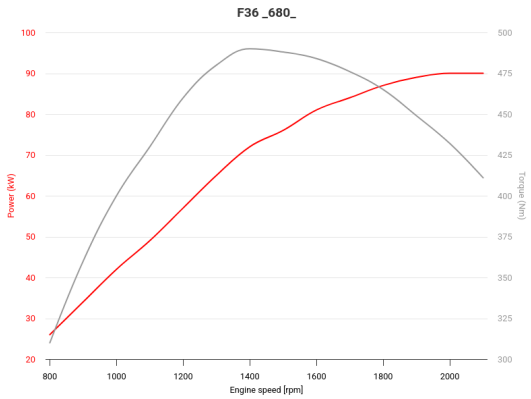

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	702 x 614 x 898
Dry Weight	Kg	320

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

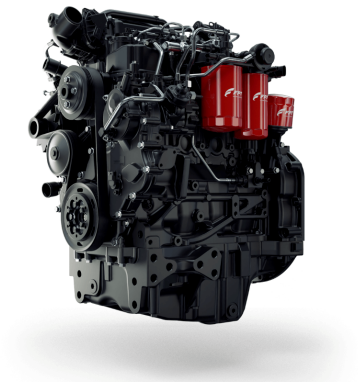

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

AGRICULTURE

Do you want to know more? CONTACT US

LEGEND

Air Handling
NA (Naturally Aspirated)
TC (Turbocharged)
TCA (Turbocharged with aftercooler)

Turbocharger
WG (Wastegate)
VGT (Variable Geometry Turbocharger)
TST (Twin-Stage Turbocharger)

Exhaust System
EGR (Exhaust Gas Recirculation)
SCR (Selective Catalytic Reduction)
DPF (Diesel Particulate Filter)
DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE