

SPECIFICATIONS



No. of cylinders / valves	4L / 4	
Injection System	ECR	
Turbocharger	TCA	
Displacement	liters	3.6
Bore x Stroke	millimeters	102 x 110
Rated power	kW (HP) @ rpm	90 (121) @ 2300
Max Torque	Nm @ rpm	490 @ 1400
ATS	Compact Hi-eSCR2	
Certification	Stage V - Tier 4 Final	

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1199 x 740 x 1376
Dry Weight	Kg	-

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

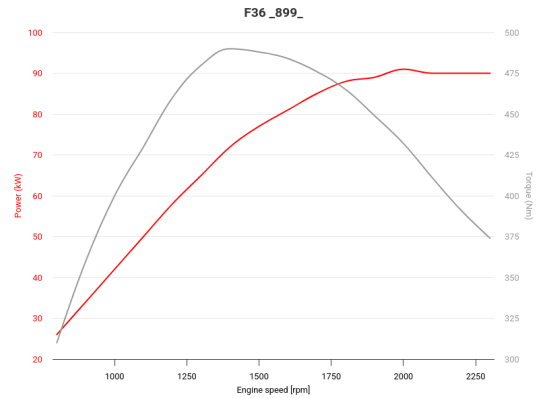

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER UNITS

Do you want to know more?



LEGEND

Air Handling

- NA (Naturally Aspirated)
- TC (Turbocharged)
- TCA (Turbocharged with aftercooler)

Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin-Stage Turbocharger)

Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DOC (Diesel Oxidation Catalyst)
- DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

