

SPECIFICATIONS

| | |
|---------------------------|-------------------------------|
| No. of cylinders / valves | 4L/2 |
| Injection System | MECHANICAL |
| Turbocharger | WG (TCA) |
| Displacement | liters 4.5 |
| Bore x Stroke | millimeters 104 x 132 |
| Max power | kW (HP) @ rpm 93 (126) @ 2200 |
| Max Torque | Nm @ rpm 525 @ 1250 |
| ATS | i-EGR |
| Certification | Stage III A - Tier 3 |

WEIGHT AND DIMENSIONS


| | | |
|------------------------|----|-----------------|
| Dimensions (L x W x H) | mm | 810 x 676 x 901 |
| Dry Weight | Kg | 410 |

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER & TORQUE

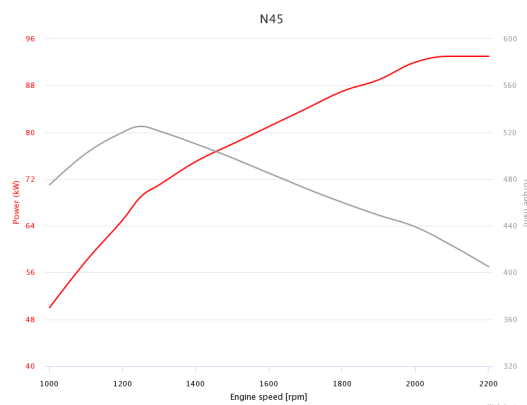

AGRICULTURE

Do you want to know more?



LEGEND

Air Handling

- NA (Naturally Aspirated)
- TC (Turbocharged)
- TCA (Turbocharged with aftercooler)

Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin-Stage Turbocharger)

Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DPF (Diesel Particulate Filter)
- DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

