

SPECIFICATIONS



No. of cylinders / valves	6L / 4	
Injection System	M	
Turbocharger	TCA	
Displacement	liters	6.7
Bore x Stroke	millimeters	104 x 132
Rated power	kW (HP) @ rpm	129 (175) @ 2200
Max Torque	Nm @ rpm	770 @ 1250
ATS	-	
Certification	Stage III A - Tier 3	

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1530 x 792 x 1208
Dry Weight	Kg	-

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

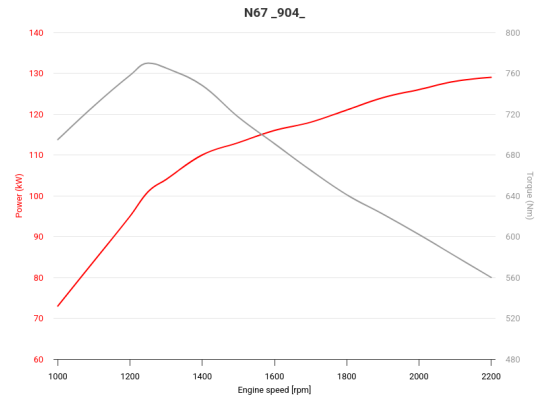

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER UNITS

Do you want to know more?



LEGEND

Air Handling

- NA (Naturally Aspirated)
- TC (Turbocharged)
- TCA (Turbocharged with aftercooler)

Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin-Stage Turbocharger)

Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DOC (Diesel Oxidation Catalyst)
- DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

