

OFF ROAD

Agriculture

CURSOR 13

CURSOR 13

397 kW (540 HP) @ 1900 rpm
Stage V - Tier 4 Final

SPECIFICATIONS


No. of cylinders / valves	6L / 4
Injection System	COMMON RAIL
Turbocharger	WG (TCA)
Displacement	liters 12.9
Bore x Stroke	millimeters 135 x 150
Max power	kW (HP) @ rpm 397 (540) @ 1900
Max Torque	Nm @ rpm 2300 @ 1400
ATS	HI-eSCR2
Certification	Stage V - Tier 4 Final

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1355 x 953 x 1213
Dry Weight	Kg	1320

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

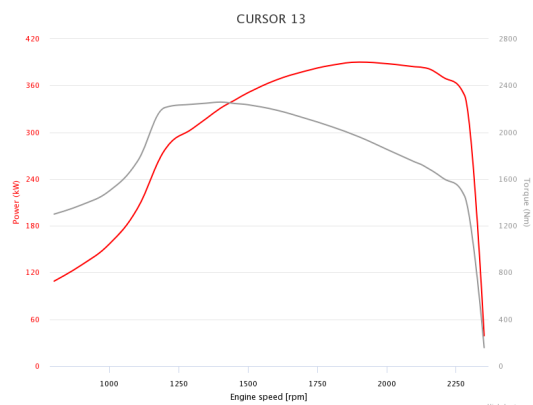

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

AGRICULTURE

Do you want to know more?



LEGEND

Air Handling

- NA (Naturally Aspirated)
- TC (Turbocharged)
- TCA (Turbocharged with aftercooler)

Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin-Stage Turbocharger)

Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DPF (Diesel Particulate Filter)
- DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

