

SPECIFICATIONS



| | |
|---------------------------|--------------------------------|
| No. of cylinders / valves | 4L / 4 |
| Injection System | ECR |
| Turbocharger | TCA |
| Displacement | liters 3.6 |
| Bore x Stroke | millimeters 102 x 110 |
| Rated power | kW (HP) @ rpm 105 (141) @ 2300 |
| Max Torque | Nm @ rpm 600 @ 1500 |
| ATS | Compact Hi-eSCR2 |
| Certification | Stage V - Tier 4 Final |

WEIGHT AND DIMENSIONS

| | | |
|------------------------|----|-------------------|
| Dimensions (L x W x H) | mm | 1199 x 740 x 1376 |
| Dry Weight | Kg | - |

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

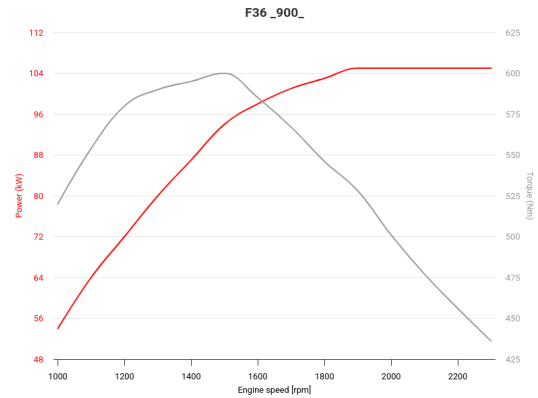

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER UNITS

Do you want to know more?



LEGEND

Air Handling

- NA (Naturally Aspirated)
- TC (Turbocharged)
- TCA (Turbocharged with aftercooler)

Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin-Stage Turbocharger)

Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DOC (Diesel Oxidation Catalyst)
- DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

